



F24-6D
 6 button two-step system that comes with 2 transmitters and 1 receiver with a control voltage of 110/220 V AC or 12-24 V AC / DC.

Also Available

- [F21-6S](#)
- [F21-6S-2TX](#)
- [F21-6S-DC](#)
- [F21-6S-DC-2TX](#)
- [F24-6S](#)
- [F24-8S](#)
- [F24-8D](#)
- [F24-10S](#)
- [F24-10D](#)
- [F24-J](#)

Legend

1. S = single step
2. D = dual step
3. 2TX = 2 transmitters
4. DC = 12-24 V AC/DC

General Specifications

Typical application: Overhead cranes, dual hoist monorails, etc...
Operating Distance: 500 feet
Frequency: 310 Mhz band
Frequency generation: Crystal (plug in)
Security coding:
Environmental rating: IP 65
Licensing: FCC certified, no license needed. FCC identifier LWN9312F24
Warranty : 1 year, see manual
Temperature rating: -35 deg C to 75 deg C (-31 deg F to 167 deg F)


Receiver Specifications

Size: W 6.5" x D 4.5" x L 10.0"
Part #: F24-6D-RX
Power Supply input: 110/220 V AC
Other input voltages: 12 -24 V AC / DC
Relay ratings: 10 amp/250 V AC
Weight: 7 lbs.
Includes: Pre-cabled.
Accessories available:
 - Horn & Lamp Kit (Part# 24T9001)
 - External Antenna Kit

Transmitter Specifications

Part #: F24-6D-TX
Transmitters: 2 supplied standard
Size: W 2.0" x D 2.0" x L 7.25"
Weight: 11 ounces
Material: Shock resistant, fiber reinforced nylon
Power source: 2 AA alkaline batteries
Battery power indication: LED
Buttons: 6 programmable, 2 step plus start and stop. Rated to 2 million cycles.
Start key: Removable
Stop Button: Mushroom style
Includes: lanyard and 2 AA batteries

Receiver Mounting

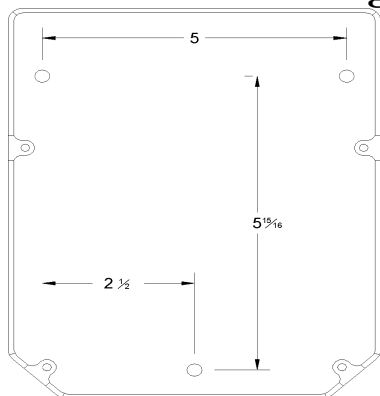

Receiver Schematic
F24-6D

